

# PRODUCT SPECIFICATION SHEET

## MAGNA CN8

STRONG ACID CATION

**NON-SOLVENT  
POLYSTYRENIC GEL  
8% CROSSLINKED  
SODIUM FORM**

ResinTech CN8 is a solvent free premium grade dark colored sodium form 8% crosslinked gel strong acid cation resin made by ResinTech in Camden, NJ. It is a workhorse cation resin optimized for commercial, industrial, and residential softening applications. CN8 is Gold Seal Certified by the WQA for potable water applications. It is intended for both potable water and industrial uses.

### APPLICATIONS

- Softening - Industrial
- Demineralization
- Iron Removal
- Ammonia Removal

TYPICAL PROPERTIES & PHYSICAL CHARACTERISTICS	
<b>Polymer Matrix</b>	Styrenic Gel
<b>Ionic Form</b>	Sodium
<b>Functional Group</b>	Sulfonic Acid
<b>Physical Form</b>	Spherical Beads
<b>Particle Size</b>	16 to 50 US Mesh (297 - 1190 µm)
<b>% &lt; 50 mesh (300µm)</b>	< 1%
<b>Minimum Sphericity</b>	90%
<b>Uniformity Coefficient</b>	1.6
<b>Reversible Swelling</b>	Na to H 5% to 9%
<b>Temp Limit</b>	280°F (138°C)
<b>Capacity (meq/mL)</b>	2.0
<b>Moisture Retention</b>	42% to 49%
<b>Shipping Weight</b>	50 - 52 lbs/ft <sup>3</sup> (801 - 833 g/L)
<b>Color</b>	Black
<b>Regenerability</b>	Yes

### CERTIFICATIONS

WQA Gold Seal



C US

Revision 1.0  
© 2020 ResinTech, Inc.

### PACKAGING OPTIONS

- 500 ml samples
- 1 ft<sup>3</sup> bags
- 1 ft<sup>3</sup> boxes
- 1 ft<sup>3</sup> drums
- 7 ft<sup>3</sup> drums
- 42 ft<sup>3</sup> supersacks






# MAGNA

## CN8

STRONG ACID CATION

**POLYSTYRENIC GEL**  
**8% CROSSLINKED**  
**SODIUM FORM**

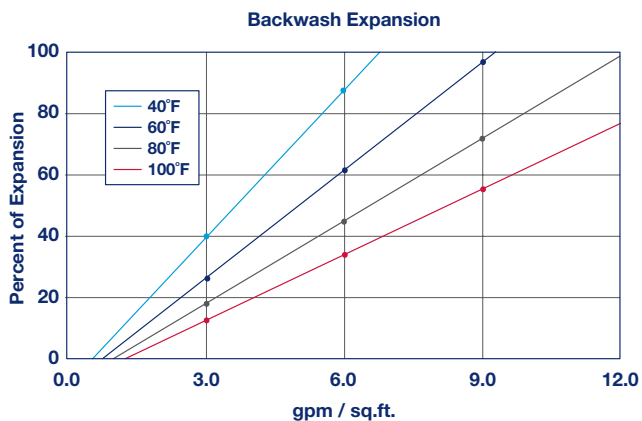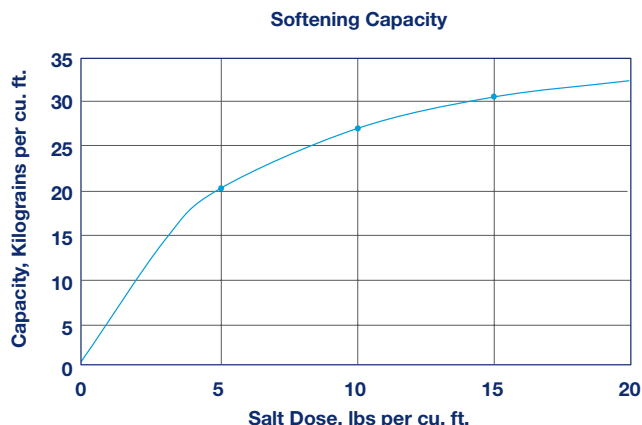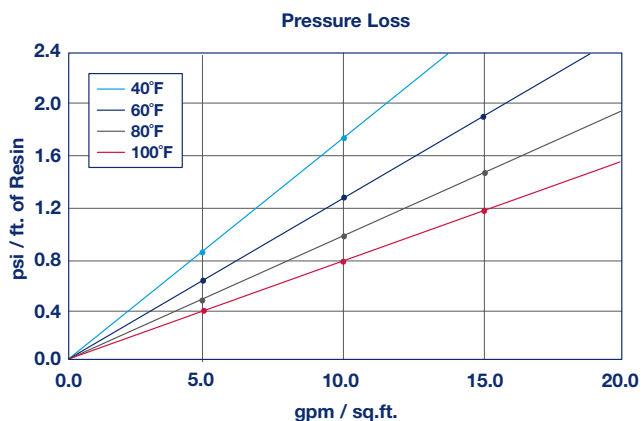

Capacity and leakage data are based on the following: 2:1 Ca:Mg ratio, 500 ppm TDS as CaCO<sub>3</sub>, 0.2% hardness in the salt and 10% brine concentration applied co-currently through the resin over 30 minutes. No engineering downgrade has been applied.

### SUGGESTED OPERATING CONDITIONS

Maximum continuous temperature	280°F
Sodium form	
Minimum bed depth	24 inches
Backwash expansion	25 to 50 percent
Maximum pressure loss	25 psi
Operating pH range	0 to 14 SU
Regenerant Concentration	
Hydrogen cycle	5 to 10 percent HCl
Hydrogen cycle	1 to 8 percent H <sub>2</sub> SO <sub>4</sub>
Salt cycle	10 to 15 percent NaCl
Regenerant level	4 to 15 lbs./cu.ft.
Regenerant flow rate.	0.5 to 1.5 gpm/cu.ft.
Regenerant contact time	>20 minutes
Displacement flow rate	Same as dilution water
Displacement volume	10 to 15 gallons/cu.ft.
Rinse flow rate	Same as service flow
Rinse volume	35 to 60 gallons/cu.ft.
Service flow rate	1 to 10 gpm/cu.ft.

Note: These guidelines describe average low risk operating conditions. They are not intended to be absolute minimums or maximums. For operation outside these guidelines, contact ResinTech Technical Support

### IRON REMOVAL

CN8 has good capacity for ferrous iron. Iron content in the feedwater should not be more than 1 mg/L Fe per each 17 mg/L of hardness.

### AMMONIA REMOVAL

CN8 is slightly selective for ammonia compared to sodium but hardness is much more preferred. Ammonia is not ionized at pH above 9 and is not well removed when the pH is significantly alkaline.

Revision 1.0  
 © 2020 ResinTech, Inc.

