

## SUPRA SIR-150

CHELATING RESIN

**BORATE REMOVAL  
POLYSTYRENIC MACROPOROUS  
FREE BASE FORM**

ResinTech SIR-150 is a borate selective macroporous chelating weak base anion resin. Its unique functionality provides exceedingly high selectivity for boron in almost any aqueous solution, yet can be regenerated with acid and then neutralized with various alkaline salts prior to use. SIR-150 is intended for all borate removal applications including potable water, ultrapure water, and boron removal from concentrated brines.

### APPLICATIONS

- Boron Removal - Potable Water
- Boron Removal - Brine
- Boron Removal - Ultrapure Water

TYPICAL PROPERTIES & PHYSICAL CHARACTERISTICS	
<b>Polymer Matrix</b>	Styrenic Macroporous
<b>Ionic Form</b>	Free Base
<b>Functional Group</b>	Methylglucamine
<b>Physical Form</b>	Spherical Beads
<b>Particle Size</b>	16 to 50 US Mesh (297 - 1190µm)
<b>% &lt; 50 mesh (300µm)</b>	< 1%
<b>Minimum Sphericity</b>	95%
<b>Uniformity Coefficient</b>	1.6
<b>Reversible Swelling</b>	Free Base to Cl 15% to 20%
<b>Temp Limit</b>	170°F (77°C)
<b>Capacity (meq/mL)</b>	0.8
<b>Moisture Retention</b>	46% to 60%
<b>Shipping Weight</b>	38 - 40 lbs/ft <sup>3</sup> (609 - 641 g/L)
<b>Color</b>	White to Tan
<b>Regenerability</b>	Yes

### PACKAGING OPTIONS

- 500 ml samples
- 1 ft<sup>3</sup> bags
- 1 ft<sup>3</sup> boxes
- 1 ft<sup>3</sup> drums
- 7 ft<sup>3</sup> drums
- 42 ft<sup>3</sup> supersacks

Revision 1.1  
© 2020 ResinTech, Inc.





# SUPRA

## SIR-150

CHELATING RESIN

**BORATE REMOVAL  
POLYSTYRENIC MACROPOROUS  
FREE BASE FORM**

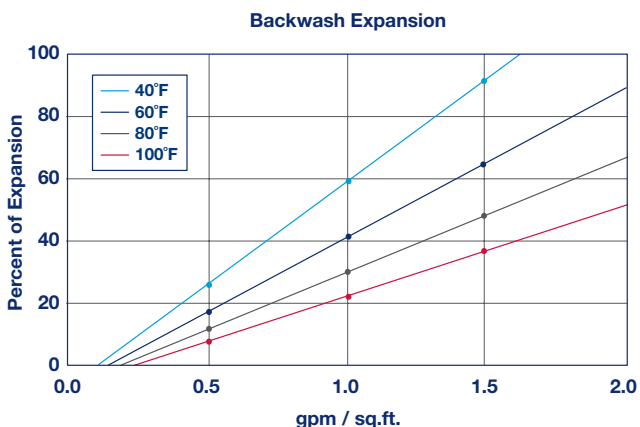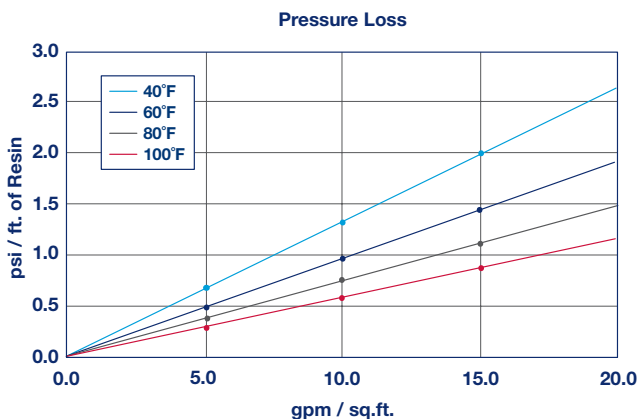

### BORON REMOVAL FROM POTABLE WATER

ResinTech SIR-150 can be used to remove boron from potable waters of any type. SIR-150 selectivity for boron is so high that the concentration of common bulk ions such as chloride, sulfate, and bicarbonate are unimportant. SIR-150 is kinetically limited and cannot be operated at a high flow rate without experiencing increased leakage and decreased throughput capacity. Regeneration is accomplished with acid to strip the boron, followed by caustic to remove the acidity. The regenerated resin should be buffered into the

potable water range to prevent possible pH excursions when first returned to service and also to prevent possible calcium carbonate scaling.

### BORON REMOVAL FROM BRINE

ResinTech SIR-150 can be used to remove boron from almost any brine stream, even when the brine is fully saturated. The brine pH must not be lower than approximately 4 or the chelating exchange groups will be destabilized and might not work properly. Ion exchange in any concentrated salt solution is kinetically hindered by high TDS, therefore flow rates are necessarily low.

### SUGGESTED OPERATING CONDITIONS

Maximum continuous temperature	170°F
Free Base form	
Minimum bed depth	24 inches
Backwash expansion	25 to 50 percent
Maximum pressure loss	20 psi
Operating pH range	4 to 10 SU
Regenerant Concentration	
Acid Strip	0.5 to 6 percent HCl
Caustic Neutralization	1 to 4 percent NaOH
Regenerant level	3 to 10 lbs./cu.ft.
Regenerant flow rate	0.25 to 1.0 gpm/cu.ft.
Regenerant contact time	>30 minutes
Displacement flow rate	Same as dilution flow
Displacement volume	10 to 15 gallons/cu.ft.
Rinse flow rate	Same as service flow
Rinse volume	35 to 60 gallons/cu.ft.
Service flow rate	0.5 to 2 gpm/cu.ft.

Note: These guidelines describe average low risk operating conditions. They are not intended to be absolute minimums or maximums. For operation outside these guidelines, contact ResinTech Technical Support

Revision 1.1  
© 2020 ResinTech, Inc.

