

PRODUCT SPECIFICATION SHEET

MAGNA CG8-H-UPS

STRONG ACID CATION

UNIFORM PARTICLE SIZE
POLYSTYRENIC GEL
8% CROSSLINKED
HYDROGEN FORM

ResinTech CG8-H-UPS is an amber-colored uniform particle size hydrogen form 8% cross-linked gel strong acid cation resin. The uniform beads and somewhat smaller harmonic mean size yields minimal pressure loss and better regeneration efficiency compared to Gaussian-sized resins. It is intended for use in all industrial applications that require a hydrogen form cation resin and is recommended for countercurrently regenerated systems such as packed beds.

APPLICATIONS

- Demineralization
- Packed Beds
- Cation Component in Mixed Beds

TYPICAL PROPERTIES & PHYSICAL CHARACTERISTICS	
Polymer Matrix	Styrenic Gel
Ionic Form	Hydrogen
Functional Group	Sulfonic Acid
Physical Form	Spherical Beads
Particle Size	20 to 40 US Mesh (400 - 841 μm)
% < 50 mesh (300μm)	< 0.5% minus 50
Minimum Sphericity	95%
Uniformity Coefficient	1.25
Reversible Swelling	H to Na -5% to -8%
Temp Limit	265°F (129°C)
Capacity (meq/mL)	1.8
Moisture Retention	47% to 56%
Shipping Weight	50 - 52 lbs/ft ³ (801 - 833 g/L)
Color	Amber
Regenerability	Yes
Uniform Particle Size	Yes

PACKAGING OPTIONS

- 1 ft³ bags
- 1 ft³ boxes
- 1 ft³ drums
- 7 ft³ drums
- 42 ft³ supersacks

Revision 1.2
ResinTech, Inc.®






MAGNA

CG8-H-UPS

STRONG ACID CATION

UNIFORM PARTICLE SIZE
POLYSTYRENIC GEL
8% CROSSLINKED
HYDROGEN FORM

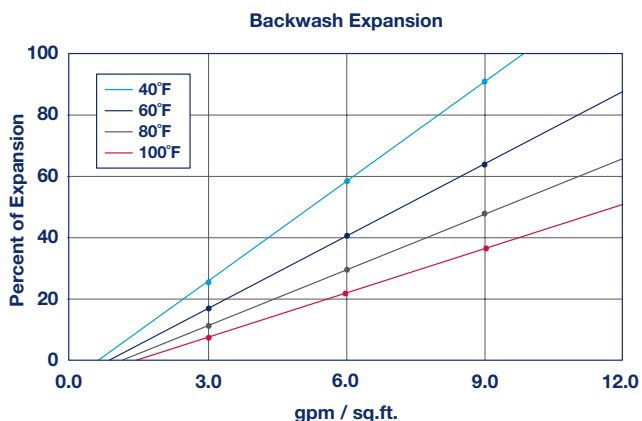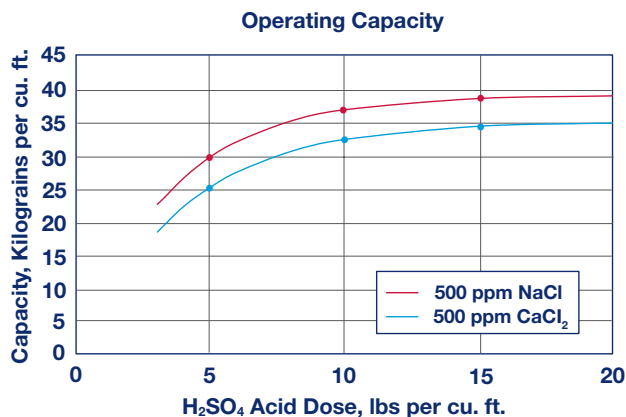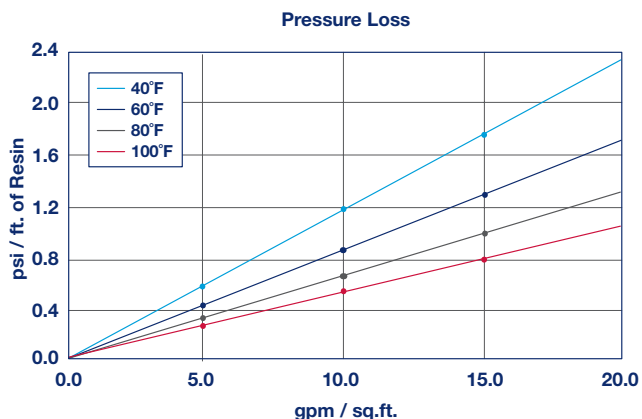

Capacity based on 500 ppm of stated salt (as CaCO₃) with 0% alkalinity, 36 in. bed depth, flow rate of 2 to 4 gpm per cu. ft. and >30 min. chemical injection time. Sulfuric acid concentration must be stepwise when calcium concentration exceeds 20% of total cations. No engineering downgrade has been applied.

SUGGESTED OPERATING CONDITIONS

Maximum continuous temperature	
Hydrogen form	265°F
Minimum bed depth	24 inches
Backwash expansion	25 to 50 percent
Maximum pressure loss	25 psi
Operating pH range	0 to 14 SU
Regenerant Concentration	
Hydrogen cycle	5 to 10 percent HCl
Hydrogen cycle	1 to 8 percent H ₂ SO ₄
Salt cycle	10 to 15 percent NaCl
Regenerant level	4 to 15 lbs./cu.ft.
Regenerant flow rate.	0.5 to 1.5 gpm/cu.ft.
Regenerant contact time	>20 minutes
Displacement flow rate	Same as dilution water
Displacement volume	10 to 15 gallons/cu.ft.
Rinse flow rate	Same as service flow
Rinse volume	35 to 60 gallons/cu.ft.
Service flow rate	1 to 10 gpm/cu.ft.

Note: These guidelines describe average low risk operating conditions. They are not intended to be absolute minimums or maximums. For operation outside these guidelines, contact ResinTech Technical Support

DEMINERALIZATION

CG8-H-UPS can be used as the cation component in a variety of demineralization applications where a hydrogen form cation resin is coupled with a hydroxide form anion resin. Common configurations include separate beds, mixed beds and other more complicated arrangements. Regeneration is accomplished with stepwise sulfuric acid or with hydrochloric acid.