

PRODUCT SPECIFICATION SHEET

MAGNA CN10

STRONG ACID CATION

**NON-SOLVENT
POLYSTYRENIC GEL
10% CROSSLINKED
SODIUM FORM**

ResinTech CN10 is a solvent free premium grade dark colored sodium form 10% crosslinked gel strong acid cation resin made by ResinTech in Camden, NJ. CN10 is Gold Seal certified by the WQA for potable water applications. CN10 is intended for use in potable and industrial applications where durability and high capacity are more important than somewhat higher chemical use compared to lower crosslinked cation resins.

APPLICATIONS

- Softening - Industrial
- Demineralization
- Softening - High Temperature



C US

TYPICAL PROPERTIES & PHYSICAL CHARACTERISTICS	
Polymer Matrix	Styrenic Gel
Ionic Form	Sodium
Functional Group	Sulfonic Acid
Physical Form	Spherical Beads
Particle Size	16 to 50 US Mesh (297 - 1190 µm)
% < 50 mesh (300µm)	< 1%
Minimum Sphericity	90%
Uniformity Coefficient	1.6
Reversible Swelling	Na to H 4% to 8%
Temp Limit	280°F (138°C)
Capacity (meq/mL)	2.2
Moisture Retention	39% to 45%
Shipping Weight	52 - 54 lbs/ft ³ (833 - 865 g/L)
Color	Black
Regenerability	Yes

CERTIFICATIONS

WQA Gold Seal*

* Meets standards:

NSF/ANSI 44: Residential Cation Exchange Water Softeners

NSF/ANSI-61: Drinking Water System Components - Health Effects

NSF/ANSI/CAN 372: Drinking Water System Components - Lead Content

Revision 1.2

ResinTech, Inc.®

PACKAGING OPTIONS

- 500 ml samples
- 1 ft³ bags
- 1 ft³ boxes
- 1 ft³ drums
- 7 ft³ drums
- 42 ft³ supersacks






RESINTECH INC.
INNOVATIONS IN ION EXCHANGE

MAGNA

CN10

STRONG ACID CATION

**NON-SOLVENT
POLYSTYRENIC GEL
10% CROSSLINKED
SODIUM FORM**

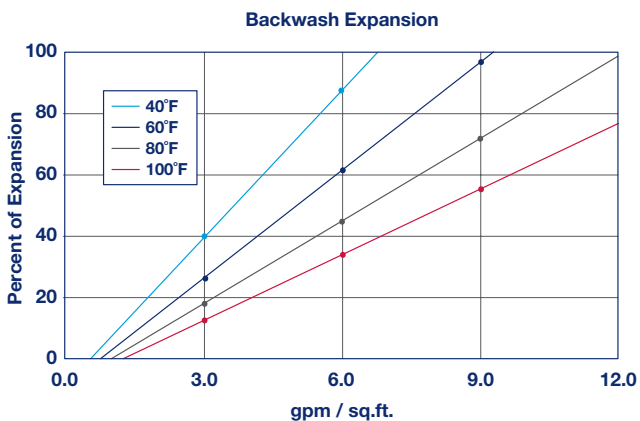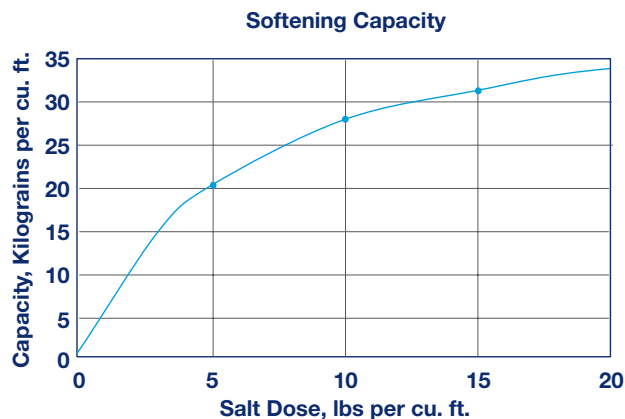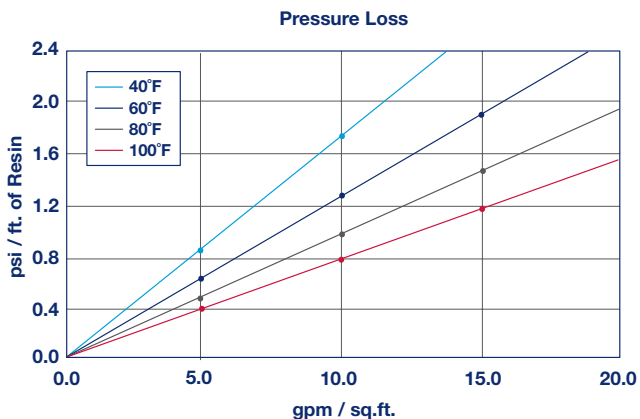

Capacity and leakage data are based on the following: 2:1 Ca:Mg ratio, 500 ppm TDS as CaCO₃, 0.2% hardness in the salt and 10% brine concentration applied co-currently through the resin over 30 minutes. No engineering downgrade has been applied.

SUGGESTED OPERATING CONDITIONS

Maximum continuous temperature	280°F
Sodium form	280°F
Minimum bed depth	24 inches
Backwash expansion	25 to 50 percent
Maximum pressure loss	25 psi
Operating pH range	0 to 14 SU
Regenerant Concentration	
Hydrogen cycle	5 to 10 percent HCl
Hydrogen cycle	1 to 8 percent H ₂ SO ₄
Salt cycle	10 to 15 percent NaCl
Regenerant level	4 to 15 lbs./cu.ft.
Regenerant flow rate.	0.5 to 1.5 gpm/cu.ft.
Regenerant contact time	>20 minutes
Displacement flow rate	Same as dilution water
Displacement volume	10 to 15 gallons/cu.ft.
Rinse flow rate	Same as service flow
Rinse volume	35 to 60 gallons/cu.ft.
Service flow rate	1 to 10 gpm/cu.ft.

HIGH TEMPERATURE USE

ResinTech CN10 is suitable for operation at temperatures as high as 280°F. At temperatures above 212°F, dissolved oxygen in the feedwater is a powerful oxidant and can chemically damage the resin. Oxygen levels in the feed should be reduced to less than 0.05 ppm to ensure a reasonable service life of the resin.

Note: These guidelines describe average low risk operating conditions. They are not intended to be absolute minimums or maximums. For operation outside these guidelines, contact ResinTech Technical Support