

PRODUCT SPECIFICATION SHEET

MAGNA CN8-H

STRONG ACID CATION

**NON-SOLVENT
POLYSTYRENIC GEL
8% CROSSLINKED
HYDROGEN FORM**

ResinTech CN8-H is a non-solvent strong acid cation resin in the hydrogen form. It is dark-colored and made using 8% cross-linked gel. CN8-H is a workhorse cation resin optimized for industrial applications like demineralization that require good regeneration efficiency and oxidative stability or where a hydrogen form cation resin is required. It is also recommended for mixed beds when visual identification of the cation is required.

APPLICATIONS

- Demineralization
- Cation Component in Mixed Beds
- High purity applications



C US

TYPICAL PROPERTIES & PHYSICAL CHARACTERISTICS	
Polymer Matrix	Styrenic Gel
Ionic Form	Hydrogen
Functional Group	Sulfonic Acid
Physical Form	Spherical Beads
Particle Size	16 to 50 US Mesh (297 - 1190 µm)
% < 50 mesh (300µm)	< 1%
Minimum Sphericity	93%
Uniformity Coefficient	1.6
Reversible Swelling	H to Na -5% to -8%
Temp Limit	265°F (129°C)
Capacity (meq/mL)	1.8
Moisture Retention	47% to 56%
Shipping Weight	49 - 51 lbs/ft ³ (785 - 817 g/L)
Color	Black
Regenerability	Yes

CERTIFICATIONS

WQA Gold Seal*

* Meets standards:

NSF/ANSI 44: Residential Cation Exchange Water Softeners

NSF/ANSI-61: Drinking Water System Components - Health Effects

NSF/ANSI/CAN 372: Drinking Water System Components - Lead Content

Revision 1.1

ResinTech, Inc.®

PACKAGING OPTIONS

- 1 ft³ bags
- 1 ft³ boxes
- 1 ft³ drums
- 7 ft³ drums
- 42 ft³ supersacks






MAGNA

CN8-H

STRONG ACID CATION

NON-SOLVENT
POLYSTYRENIC GEL
8% CROSSLINKED
HYDROGEN FORM

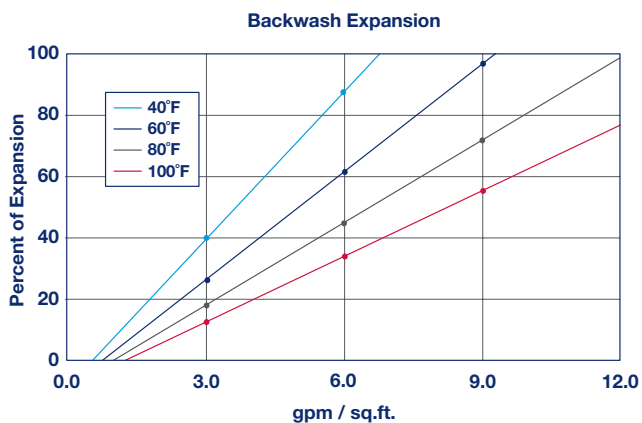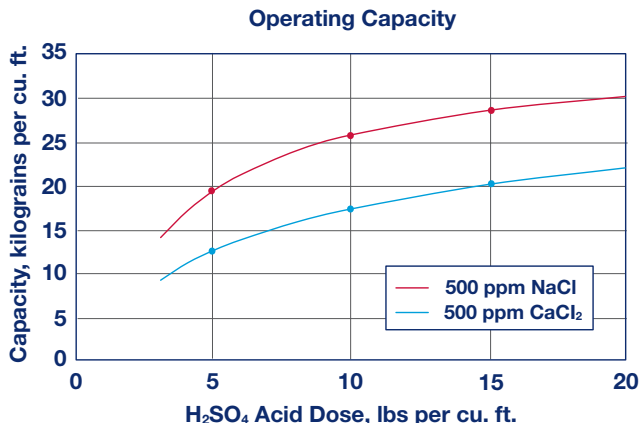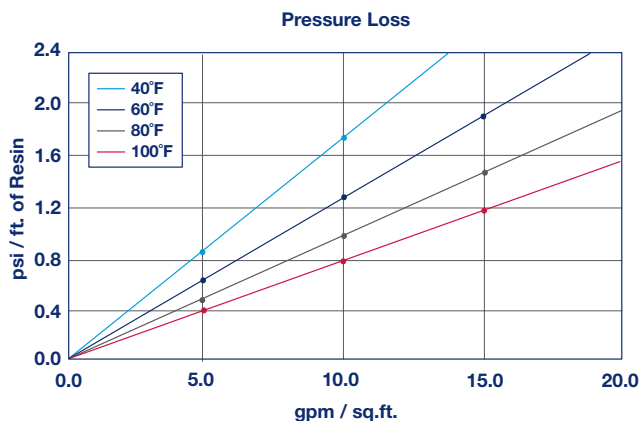

Capacity based on 500 ppm of stated salt (as CaCO₃) with 0% alkalinity, 36 in. bed depth, flow rate of 2 to 4 gpm per cu. ft. and >30 min. chemical injection time. Sulfuric acid concentration must be stepwise when calcium concentration exceeds 20% of total cations. No engineering downgrade has been applied.

SUGGESTED OPERATING CONDITIONS

Maximum continuous temperature	265°F
Sodium form	265°F
Minimum bed depth	24 inches
Backwash expansion	25 to 50 percent
Maximum pressure loss	25 psi
Operating pH range	0 to 14 SU
Regenerant Concentration	
Hydrogen cycle	5 to 10 percent HCl
Hydrogen cycle	1 to 8 percent H ₂ SO ₄
Salt cycle	10 to 15 percent NaCl
Regenerant level	4 to 15 lbs./cu.ft.
Regenerant flow rate.	0.5 to 1.5 gpm/cu.ft.
Regenerant contact time	>20 minutes
Displacement flow rate	Same as dilution water
Displacement volume	10 to 15 gallons/cu.ft.
Rinse flow rate	Same as service flow
Rinse volume	35 to 60 gallons/cu.ft.
Service flow rate	1 to 10 gpm/cu.ft.

DEMINERALIZATION

ResinTech CN8-H can be used as the cation component in separate bed and mixed bed demineralization applications where a hydrogen form cation resin is coupled with a hydroxide form anion resin. Regeneration is accomplished with stepwise sulfuric acid or with hydrochloric acid.

Note: These guidelines describe average low risk operating conditions. They are not intended to be absolute minimums or maximums. For operation outside these guidelines, contact ResinTech Technical Support

Revision 1.1
ResinTech, Inc.®

