

## MAGNA SBMP1-OH

STRONG BASE ANION

TYPE I ANION  
STYRENIC MACROPOROUS  
HYDROXIDE FORM

ResinTech SBMP1-OH is a type 1 macroporous strong base anion resin in hydroxide form. It has higher crosslinking than gel anion resins, greater physical, thermal, and oxidative strength, and is optimized for waters that punish other anion resins. SBMP1-OH is intended for high flow rate and high temperature polishing applications, and for other applications that require the highest possible physical strength and chemical durability.

### APPLICATIONS

- Demineralization

TYPICAL PROPERTIES & PHYSICAL CHARACTERISTICS	
<b>Polymer Matrix</b>	Styrenic Macroporous
<b>Ionic Form</b>	Hydroxide
<b>Functional Group</b>	Trimethylamine
<b>Physical Form</b>	Spherical Beads
<b>Particle Size</b>	16 to 50 US Mesh (297 - 1190 µm)
<b>% &lt; 50 mesh (300µm)</b>	< 1%
<b>Minimum Sphericity</b>	97%
<b>Uniformity Coefficient</b>	1.6
<b>Reversible Swelling</b>	OH to Cl -18% to -25%
<b>Temp Limit</b>	120°F (49°C)
<b>Capacity (meq/mL)</b>	0.9
<b>Moisture Retention</b>	64% to 73%
<b>Shipping Weight</b>	39 - 41 lbs/ft³ (625 - 657 g/L)
<b>Color</b>	Yellow to Tan
<b>Regenerability</b>	Yes

### PACKAGING OPTIONS

- 1 ft³ bags
- 1 ft³ boxes
- 1 ft³ drums
- 7 ft³ drums
- 42 ft³ supersacks




Revision 1.0  
ResinTech, Inc.®



# MAGNA SBMP1-OH

STRONG BASE ANION

TYPE I ANION  
STYRENIC MACROPOROUS  
HYDROXIDE FORM

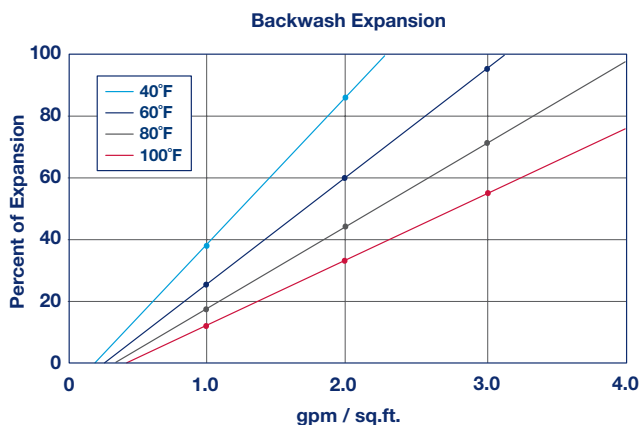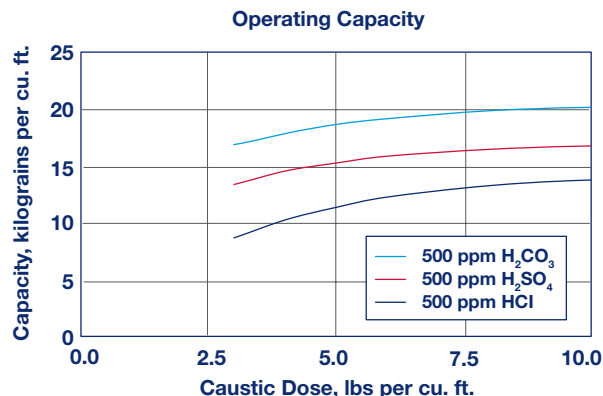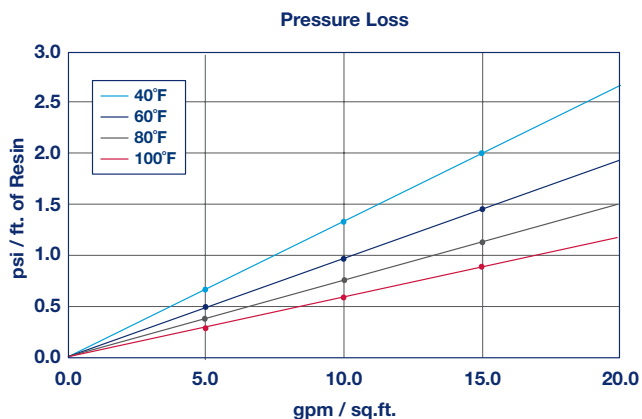

## DEMINEERALIZATION

ResinTech SBMP1-OH can be used as the anion component in a variety of demineralization applications where a hydroxide form anion resin is coupled with a hydrogen form cation resin and the highest possible durability is desired. SBMP1-OH is ideal for high flow rate polishers and where high resistance to mechanical, thermal, and oxidative stresses is required.

## SUGGESTED OPERATING CONDITIONS

Maximum continuous temperature	140°F
Hydroxide form	
Minimum bed depth	24 inches
Backwash expansion	25 to 50 percent
Maximum pressure loss	20 psi
Operating pH range	0 to 14 SU
Regenerant Concentration	
Hydroxide cycle	2 to 6 percent NaOH
Salt cycle	2 to 10 percent NaCl
Regenerant level	4 to 10 lbs./cu.ft.
Regenerant flow rate	0.25 to 1.0 gpm/cu.ft.
Regenerant contact time	>40 minutes
Displacement flow rate	Same as dilution water
Displacement volume	10 to 15 gallons/cu.ft.
Rinse flow rate	Same as service flow
Rinse volume	35 to 60 gallons/cu.ft.
Service flow rate	1 to 10 gpm/cu.ft.

Note: These guidelines describe average low risk operating conditions. They are not intended to be absolute minimums or maximums.  
For operation outside these guidelines, contact ResinTech Technical Support