

## ARIES CHLORINE REDUCTION

CARBON BLOCK SERIES, DROP-IN CARTRIDGE

TASTE & ODOR CORRECTION  
CHLORINE REDUCTION

Carbon filtration is an inexpensive and effective way to remove chemicals and contaminants commonly found in tap water. Aries carbon block cartridges are an ideal choice for taste and odor control, chlorine/chloramine reduction, and organic, lead, and cyst reduction. Each block is wrapped with a polypropylene outer layer and netting to prevent premature clogging of the carbon block.



### HIGHLIGHTS

- High adsorptive capacity and efficiency
- Lot Control Traceability
- Made in the USA

### APPLICATIONS

- Ideal for both pre- and post- RO filtration
- Drinking Water
- All Potable Applications

### CERTIFICATIONS

- NSF Certified
- NSF/ANSI Standard 42

### SPECIFICATIONS


- Nominal Rating of 5 - 10 $\mu$
- Max Pressure of 125 psi (850 kPa)
- Max Temperature 170°F (77°C)

Revision 1.1  
ResinTech, Inc.®



DIMENSIONS	INITIAL PRESSURE DROP	NOMINAL RATING	CAPACITY*		PART NUMBER
			gal	L	
2.5 x 10 in. (Slim Line)	<5 psi @ 5 GPM	5μ	8,000	30,500	<b>CB-10-6305-TO</b>
2.5 x 20 in. (Slim Line)	<5 psi @ 1 GPM	5μ	16,000	60,500	<b>CB-20-6305-TO</b>
4.5 x 10 in. (Big Blue)	<6 psi @ 3 GPM	5μ	16,000	60,500	<b>CB-10-6305-BB-TO</b>
4.5 x 20 in. (Big Blue)	<8 psi @ 6 GPM	5μ	32,000	121,000	<b>CB-20-6305-BB-TO</b>
2.5 x 10 in. (Slim Line)	<5 psi @ 1 GPM	10μ	8,000	30,500	<b>CB-10-6310-TO</b>
2.5 x 20 in. (Slim Line)	<5 psi @ 2 GPM	10μ	16,000	60,500	<b>CB-20-6310-TO</b>
4.5 x 10 in. (Big Blue)	<6 psi @ 3 GPM	10μ	16,000	60,500	<b>CB-10-6310-BB-TO</b>
4.5 x 20 in. (Big Blue)	<8 psi @ 6 GPM	10μ	32,000	121,000	<b>CB-20-6310-BB-TO</b>

\*Based on internal manufacturer's testing.

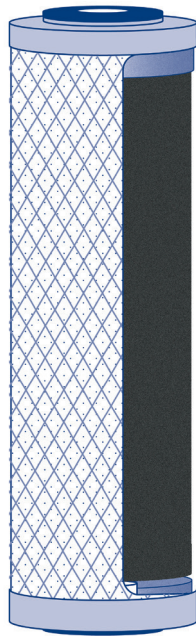

### COMPONENTS

- Outer Layer - PP
- Netting- PP
- Media - Activated Coconut Shell Carbon



**WE ARE PROUD TO BE  
ISO 9001 : 2015 CERTIFIED**



COMPONENT

**Filter Cartridge has been tested and certified by  
NSF International Against NSF/ANSI Standard 42 for  
material requirements only.**

**IMPORTANT NOTICE TO USER:** The following is made in lieu of all other warranties expressed or implied. Manufacturer's and Seller's only obligation shall be to issue credit against the purchase or replacement of the equipment proved to be defective in material or workmanship. Neither Manufacturer nor Seller shall be liable for any injury, loss or damage, direct or indirect, special or consequential, arising out of the use of, misuse, or the inability to use such product. The information contained herein is based on technical data and tests which we believe to be reliable and is intended for use by persons having technical skill at their discretion and risk. Since conditions of use are outside ResinTech's control, we can assume no liability whatsoever for results obtained or damages incurred through the application of the data presented. This information is not intended as a license to operate under, or a recommendation to infringe upon, any patent of ResinTech's or others covering any material or use. The foregoing may not be altered except by written agreement signed by officers of the manufacturer.