


# ARIES

## SOFTENING & IRON REMOVAL

INLINE SERIES, SINGLE-BED, DROP-IN CARTRIDGE

GENERAL SOFTENING  
HARDNESS / IRON REMOVAL

Aries softening cartridges use ResinTech® CGS, a cation exchange softening grade resin for residential applications. Softening cartridges remove these “hard” minerals leaving the water soft and more satisfactory for household and commercial use. Available in Quick Connect or 1/4” FNPT connectors in 5 and 10” lengths. Aries Inline filters cartridges are designed for low-flow, point-of-use filtration.

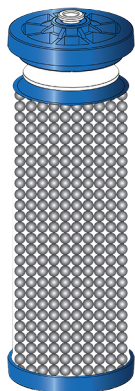

### HIGHLIGHTS

- Hardness / Iron Removal
- Resintech® CGS-
- Fits Standard Residential & Industrial Size Housing
- Oversized Cartridge for Maximum Media Fill
- Quality Produced & Made in the USA
- WQA Gold Seal Certified

### APPLICATIONS

- Pre RO
- Ionizers
- Water Coolers

### MEDIA

- ResinTech® CGS (100%)

### CERTIFICATIONS

- WQA Gold Seal
- California Prop. 65 Compliant

### SPECIFICATIONS

- Nominal Rating of 25µ
- Max Pressure of 125 psi (861.85 kpa)
- Max Temperature 100°F (37.8 °C)

DIMENSIONS	SERVICE FLOW	MAX FLOW	CAPACITY	PART NUMBER
6 x 2 in. (Quick Connect)	0.2 gpm (.76 lpm)	-	395 grains	IFB-06-3003-QC
12 x 2 in. (Quick Connect)	0.4 gpm (1.51 lpm)	-	790 grains	IFB-12-3003-QC
6 x 2 in. (1/4 in. FNPT)	0.2 gpm (.76 lpm)	-	395 grains	IFB-06-3003-FT
12 x 2 in. (1/4 in. FNPT)	0.4 gpm (1.51 lpm)	-	790 grains	IFB-12-3003-FT



#### COMPONENT

Filter cartridge Certified to NSF/ANSI Standard 42 and NSF/ANSI Standard 61 for material requirement(s) only. Filter cartridge Certified to NSF/ANSI Standard 372 for low lead compliance.

Revision 1.0

© 2020 ResinTech, Inc.

